LUX-CM630-277-M19

LUXX 630W CMH 277V TECHNICAL SPECIFICATIONS

Physical		
Ballast Length	180mm	7.1”
Ballast Width	280mm	11”
Ballast Height	105mm	4.1”
Hood Length	356mm	14”
Hood Width	356mm	14”
Total Length	685mm	26.9”
Total Weight	7.46kg	16.44lbs

Performance	
Input Voltage	277V
277V	2.60A
Input Current	2.6A
Input Power	686W
Min Power Factor	>95%
THD	<15%
Power Cord	10ft
277V	NEMA L7-15P (10ft)

Performance Requirements	
Rated Mains Voltage	120-277V
Mains Frequency	50/60Hz
Operation Frequency	140-220Hz
Voltage Range	108-305V

Luxx 630w CMH | Distance From Canopy: 2´ | 4x4 Footprint

122				341				130
	220			560			240	
		468		910		460		
			731	901	742			
208	332	648	715	787	766	650	363	222
			700	839	715			
		478		957		504		
	250			685			273	
144				402				126

Average PPFD = 562.7

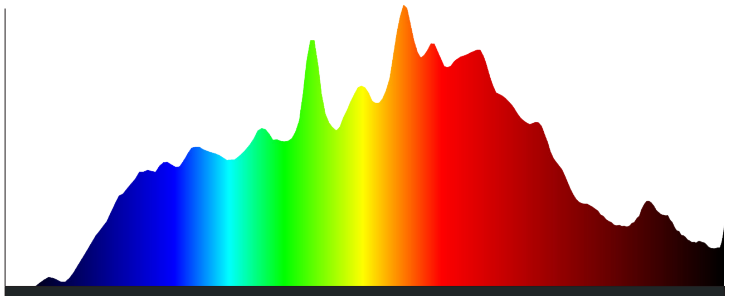
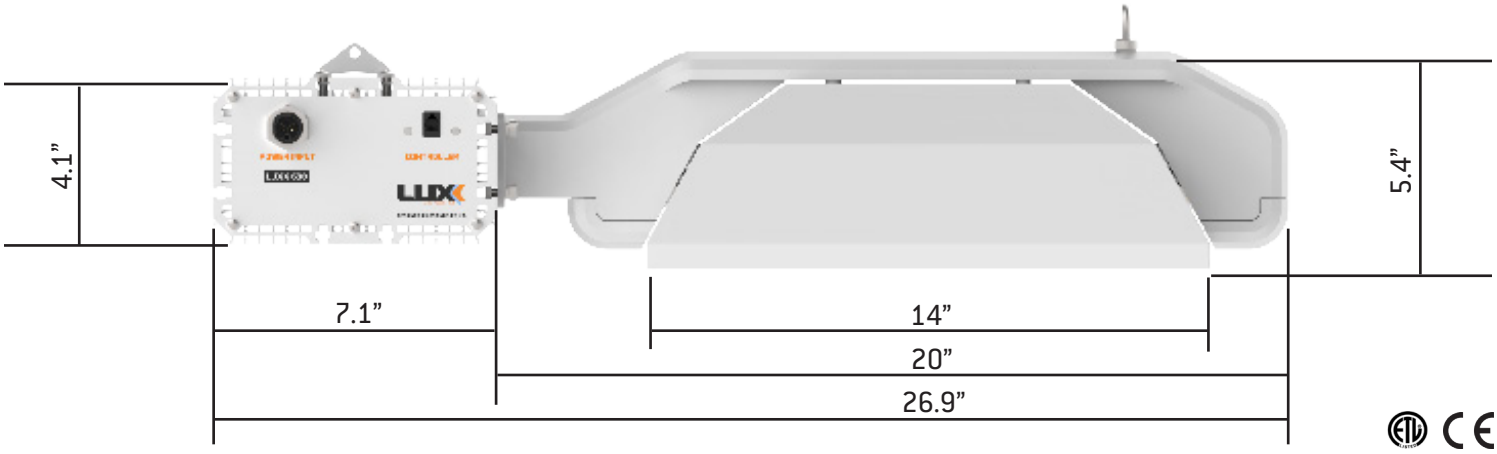
Wavelength (NM) | Luxx 315 CMH 4200k