

# LUX-CM630-240

## LUX 630W CMH 120-240V TECHNICAL SPECIFICATIONS



### Physical

Ballast Length	180mm 7.1"
Ballast Width	280mm 11"
Ballast Height	105mm 4.1"
Hood Length	356mm 14"
Hood Width	356mm 14"
Total Length	685mm 26.9"
Total Weight	7.46kg 16.44lbs

### Performance

Input Voltage	120 / 208 / 240V
120V	5.83A
208V	3.27A
240V	2.83A
Input Current	5.83-2.83A
Input Power	686W
Min Power Factor	>95%
THD	<10%
Power Cord	10ft
208-240V	NEMA 6-15P (10ft)


### Performance Requirements

Rated Mains Voltage	120-240v
Mains Frequency	50/60Hz
Operation Frequency	140-220Hz
Voltage Range	108-305V

### Luxx 630w CMH | Distance From Canopy: 2' | 4x4 Footprint

122				341				130
	220			560				240
		468		910		460		
			731	901	742			
208	332	648	715	787	766	650	363	222
			700	839	715			
		478		957		504		
	250			685				273
144				402				126

Average PPFD = 562.7

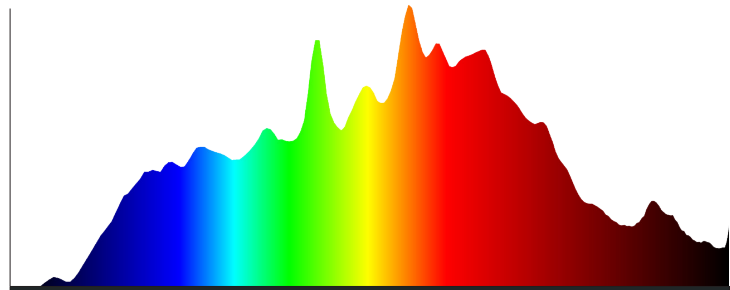

Wavelength (NM) | Luxx 315 CMH 4200k

